

LED Module Flood Light




GRAPHIC TWISTER
PHOTOREALISTIC
2015

Features


- Flexible modular design, easiest installation and maintenance
- Modular thermal management design ensuring low LED junction temperature
- Multiple optical lens options, suit for different lighting applications
- Original Cree chips, Meanwell driver, 5 years warranty
- It is perfectly suitable for outdoor lighting applications










BLT-FLA-160



BLT-FLA-240



BLT-FLA-320

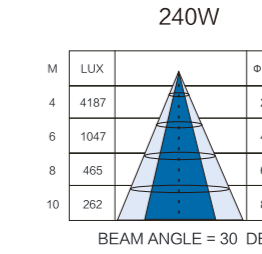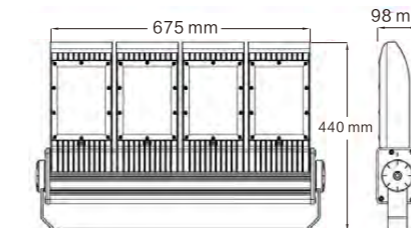



Model	BLT-FLA-160	BLT-FLA-240	BLT-FLA-320
LED Power	145W	220W	290W
LED Source	Cree XTE	Cree XTE	Cree XTE
Input Voltage	AC90-305V,50/60Hz	AC90-305V,50/60Hz	AC90-305V,50/60Hz
System Power	160W	240W	320W
Beam Angle	15° / 30° / 45° / 60° / 90° / 120° / 60*135° / 85*135°		
LED Qty	72 Pcs	108 Pcs	144 Pcs
Luminous Flux	16500 LM	24500 LM	32500 LM
CCT	2700K - 6500K	2700K - 6500K	2700K - 6500K
CRI	Ra>70	Ra>70	Ra>70
Operating Temp	-40°C ~ 50 °C	-40°C ~ 50 °C	-40°C ~ 50 °C
IP Rating	IP 65	IP 65	IP 65
Life-span	>50000H	>50000H	>50000H
Net weight	8.8KG	12.7KG	16.3KG



LED Module Flood Light



- ### Features
- Flexible modular design, easiest installation and maintenance
 - The bracket accords with mechanical structure design, and available for a adjustment of 360°
 - Modular thermal management design ensuring low LED junction temperature
 - Multiple optical lens options, suit for different lighting applications
 - Original Cree chips, Meanwell driver, 5 years warranty

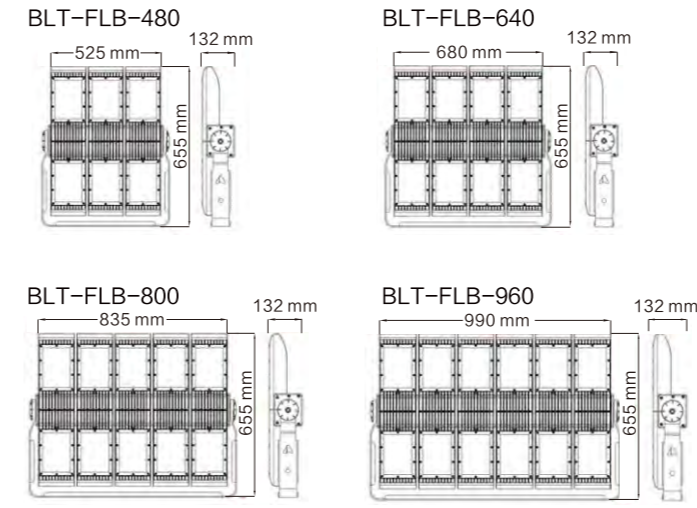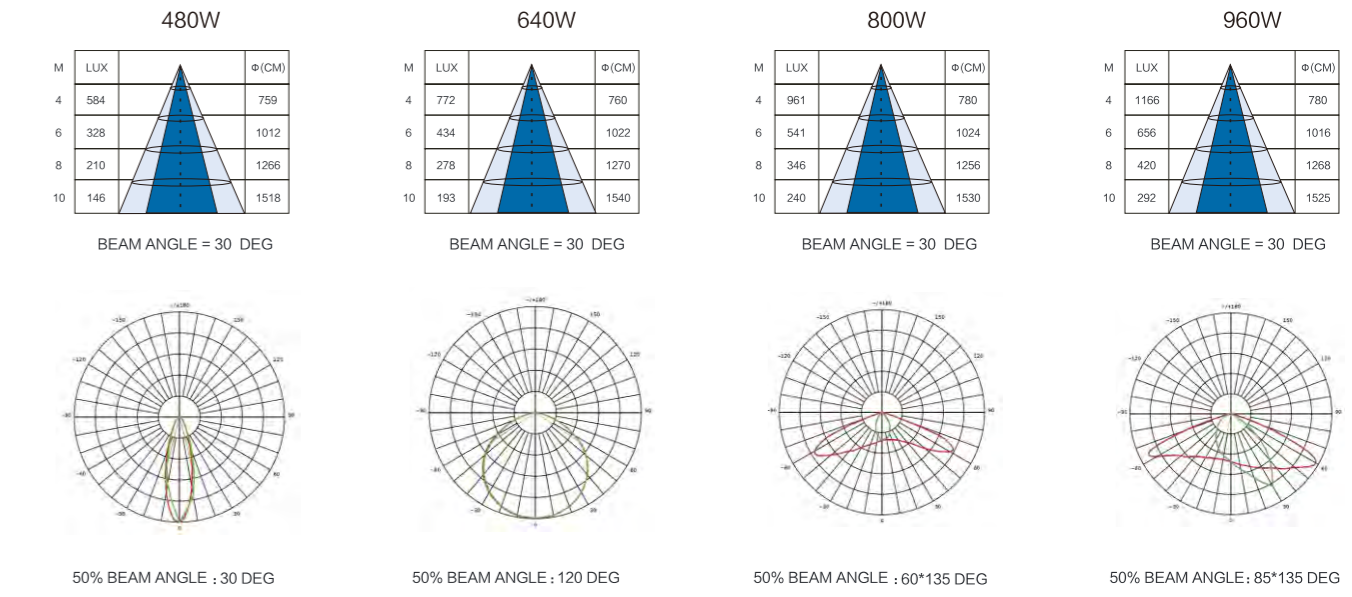

Model	BLT-FLB-480	BLT-FLB-640	BLT-FLB-800	BLT-FLB-960
LED Power	440W	580W	730W	870W
LED Source	Cree XTE	Cree XTE	Cree XTE	Cree XTE
Input Voltage	AC90-305V,50/60Hz	AC90-305V,50/60Hz	AC90-305V,50/60Hz	AC90-305V,50/60Hz
System Power	480W	640W	800W	960W
Beam Angle	15° / 30° / 45° / 60° / 90° / 120° / 60*135° / 85*135°			
LED Qty	216 Pcs	288 Pcs	360 Pcs	432 Pcs
Luminous Flux	47500 LM	65500 LM	80000 LM	93000 LM
CCT	2700K - 6500K	2700K - 6500K	2700K - 6500K	2700K - 6500K
CRI	Ra >70	Ra >70	Ra >70	Ra >70
Operating Temp	-40 °C ~ 50 °C	-40 °C ~ 50 °C	-40 °C ~ 50 °C	-40 °C ~ 50 °C
IP Rating	IP 65	IP 65	IP 65	IP 65
Life-span	>50000H	>50000H	>50000H	>50000H
Net weight	24.6KG	32.0KG	38.7KG	45.3KG