

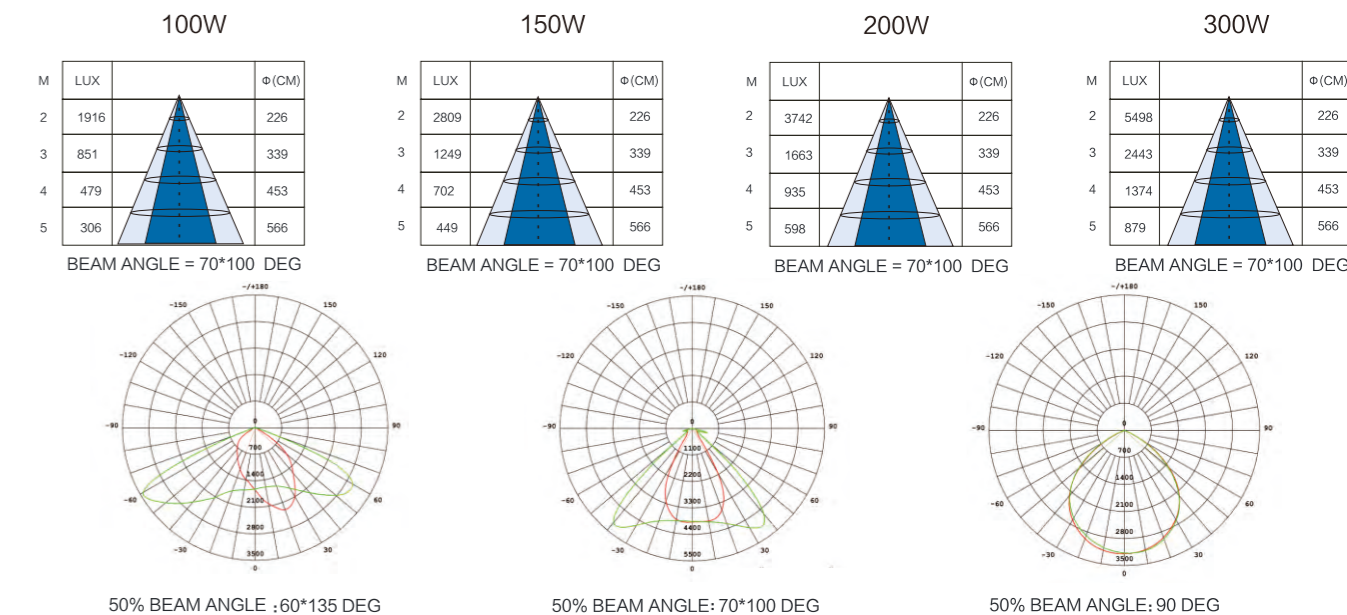
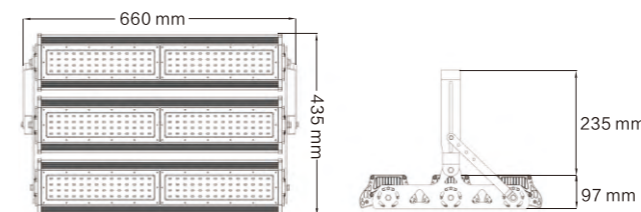
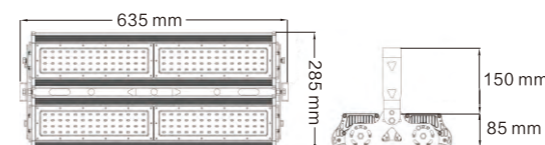


LED Multi-directional Flood Light

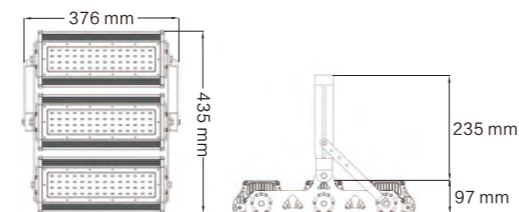

Features

- Available for the whole lamp to adjust lighting angles, also available for the single module to make it
- Multiple optical lens options, suit for different lighting applications
- Flexible modular design, easiest installation and maintenance
- Original Lumileds led chips, Inventronics driver, 5 years warranty
- Strips structure design to assemble various wattage

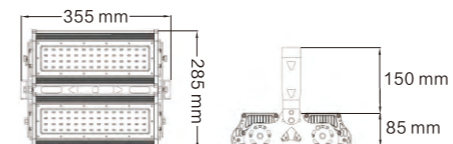

| Model | BLT-MFL-100-2 | BLT-MFL-150-3 | BLT-MFL-200-2 | BLT-MFL-300-3 |
|----------------|-------------------------|-------------------|-------------------|-------------------|
| LED Power | 100W | 150W | 200W | 300W |
| LED Source | Lumileds | Lumileds | Lumileds | Lumileds |
| Input Voltage | AC90-305V,50/60Hz | AC90-305V,50/60Hz | AC90-305V,50/60Hz | AC90-305V,50/60Hz |
| System Power | 105W | 165W | 220W | 330W |
| Beam Angle | 90° / 60*135° / 70*100° | | | |
| LED Qty | 112 Pcs | 168 Pcs | 224 Pcs | 336 Pcs |
| Luminous Flux | 11500 LM | 18000 LM | 23500 LM | 34800 LM |
| CCT | 2700K - 6500K | 2700K - 6500K | 2700K - 6500K | 2700K - 6500K |
| CRI | Ra > 70 | Ra > 70 | Ra > 70 | Ra > 70 |
| Operating Temp | -40°C ~ 50 °C | -40°C ~ 50 °C | -40°C ~ 50 °C | -40°C ~ 50 °C |
| IP Rating | IP 65 | IP 65 | IP 65 | IP 65 |
| Life-span | >50000H | >50000H | >50000H | >50000H |
| Net weight | 6.0KG | 8.2KG | 10.0KG | 14.5KG |