







50% BEAM ANGLE : 120 DEG



50% BEAM ANGLE : 120 DEG




50% BEAM ANGLE : 120 DEG




50% BEAM ANGLE : 120 DEG


BLT-HBR-60




BLT-HBR-150

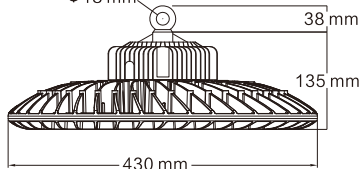

BLT-HBR-90



BLT-HBR-200

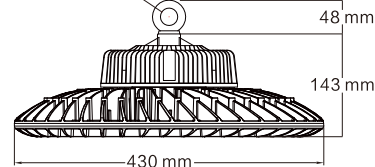

Features

- Unique patented design, high quality processing technology, Special surface treatment
- Ultra-high efficiency >120 lm/w
- Extremely light weight to enhance the safety use and installation
- Mutiple Installations(hook mounted, pipe, wall mounted etc.)
- Original Lumileds Chips, Meanwell driver, 5 years warranty



Model	BLT-HBR-60	BLT-HBR-90	BLT-HBR-120	BLT-HBR-150	BLT-HBR-200
LED Power	60W	90W	120W	150W	200W
LED Source	Lumileds	Lumileds	Lumileds	Lumileds	Lumileds
Input Voltage	AC90-295V,50/60Hz	AC90-305V,50/60Hz	AC90-305V,50/60Hz	AC90-305V,50/60Hz	AC90-305V,50/60Hz
System Power	61W	100W	130W	165W	220W
Beam Angle	120°	120°	120°	120°	120°
LED Qty	81 Pcs	120 Pcs	176 Pcs	208 Pcs	272 Pcs
Luminous Flux	6900 LM	11500 LM	14950 LM	19000 LM	25000 LM
CCT	2700K - 6500K	2700K - 6500K	2700K - 6500K	2700K - 6500K	2700K - 6500K
CRI	Ra > 80	Ra > 80	Ra > 80	Ra > 80	Ra > 80
Operating Temp	-40 ℃ ~ 50 ℃	-40 ℃ ~ 50 ℃	-40 ℃ ~ 50 ℃	-40 ℃ ~ 50 ℃	-40℃ ~ 50 ℃
IP Rating	IP 65	IP 65	IP 65	IP 65	IP 65
Life-span	>50000H	>50000H	>50000H	>50000H	>50000H
Net weight	3.7KG	4.4KG	4.8KG	6.8KG	7.8KG

LED UFO High Bay Light





Features



- Unique patented design, high quality processing technology, Special surface treatment
- Ultra-high efficiency > 140 lm/w
- Extremely light weight to enhance the safety use and installation
- Mutiple Installations(hook mounted, pipe, wall mounted etc.)
- Original Lumileds Chips, Meanwell driver, 5 years warranty





50% BEAM ANGLE : 120 DEG



50% BEAM ANGLE : 120 DEG




50% BEAM ANGLE : 120 DEG




50% BEAM ANGLE : 120 DEG


BLT-HBR-60H




BLT-HBR-150H

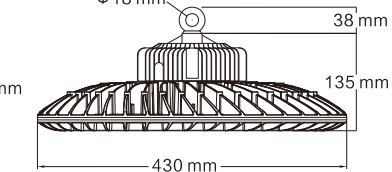

BLT-HBR-90H



BLT-HBR-200H

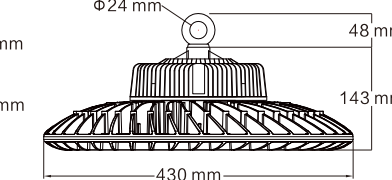

Model	BLT-HBR-60H	BLT-HBR-90H	BLT-HBR-120H	BLT-HBR-150H	BLT-HBR-200H
LED Power	60W	90W	120W	150W	200W
LED Source	Lumileds	Lumileds	Lumileds	Lumileds	Lumileds
Input Voltage	AC90-295V,50/60Hz	AC90-305V,50/60Hz	AC90-305V,50/60Hz	AC90-305V,50/60Hz	AC90-305V,50/60Hz
System Power	61W	100W	130W	165W	220W
Beam Angle	120°	120°	120°	120°	120°
LED Qty	135 Pcs	240 Pcs	306 Pcs	376 Pcs	480 Pcs
Luminous Flux	7950 LM	13000 LM	16800 LM	21900 LM	28100 LM
CCT	2700K - 6500K	2700K - 6500K	2700K - 6500K	2700K - 6500K	2700K - 6500K
CRI	Ra > 80	Ra > 80	Ra > 80	Ra > 80	Ra > 80
Operating Temp	-40℃ ~ 50℃	-40℃ ~ 50℃	-40℃ ~ 50℃	-40℃ ~ 50℃	-40℃ ~ 50℃
IP Rating	IP 65	IP 65	IP 65	IP 65	IP 65
Life-span	>50000H	>50000H	>50000H	>50000H	>50000H
Net weight	3.7KG	4.4KG	5.2KG	6.8KG	7.8KG