


## Circular Area LED Lighting

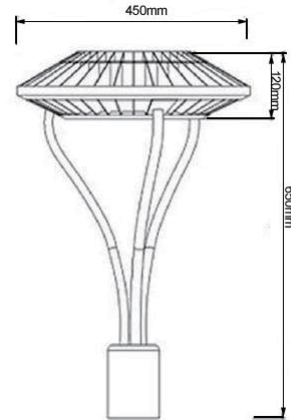

### Features

- Die cast Aluminum house, excellent thermal control.
- Dimmable: 1-10VDC/PWM/Resistor (3 IN 1).
- Air-flow fins for maximum heat dissipation.
- Compatible with standard 2 3/8" and 3" tenons.
- IP Rating: IP65.

### Applications

- Ideal for large outdoor areas such as parking lots, corporate parks, and retail settings.



Item No.	Size	Power	Voltage	Color	Power Factor	Luminous Flux	CRI	Lifespan
V-AL01	450x120x650mm 17.72"x4.72"x25.59"	100W	AC100-277V	2700K/4000K/5000K/5700K	0.99	10,000lm	≥70	50,000
V-AL02	450x120x650mm 17.72"x4.72"x25.59"	170W	AC100-277V	2700K/4000K/5000K/5700K	0.99	17,000lm	≥70	50,000
V-AL03	450x120x650mm 17.72"x4.72"x25.59"	50W	AC100-277V	2700K/4000K/5000K/5700K	0.99	6100lm	≥70	50,000
V-AL04	450x120x650mm 17.72"x4.72"x25.59"	75W	AC100-277V	2700K/4000K/5000K/5700K	0.99	7600lm	≥70	50,000